

Inventors: Kent C. Ericksen, et al.

1 / 8



Title: ABOVE-GROUND ADJUSTABLE SPRAY PATTERN SPRINKLER

Inventors: Kent C. Ericksen, et al.

Docket No.: 3146.2.34

2 / 8

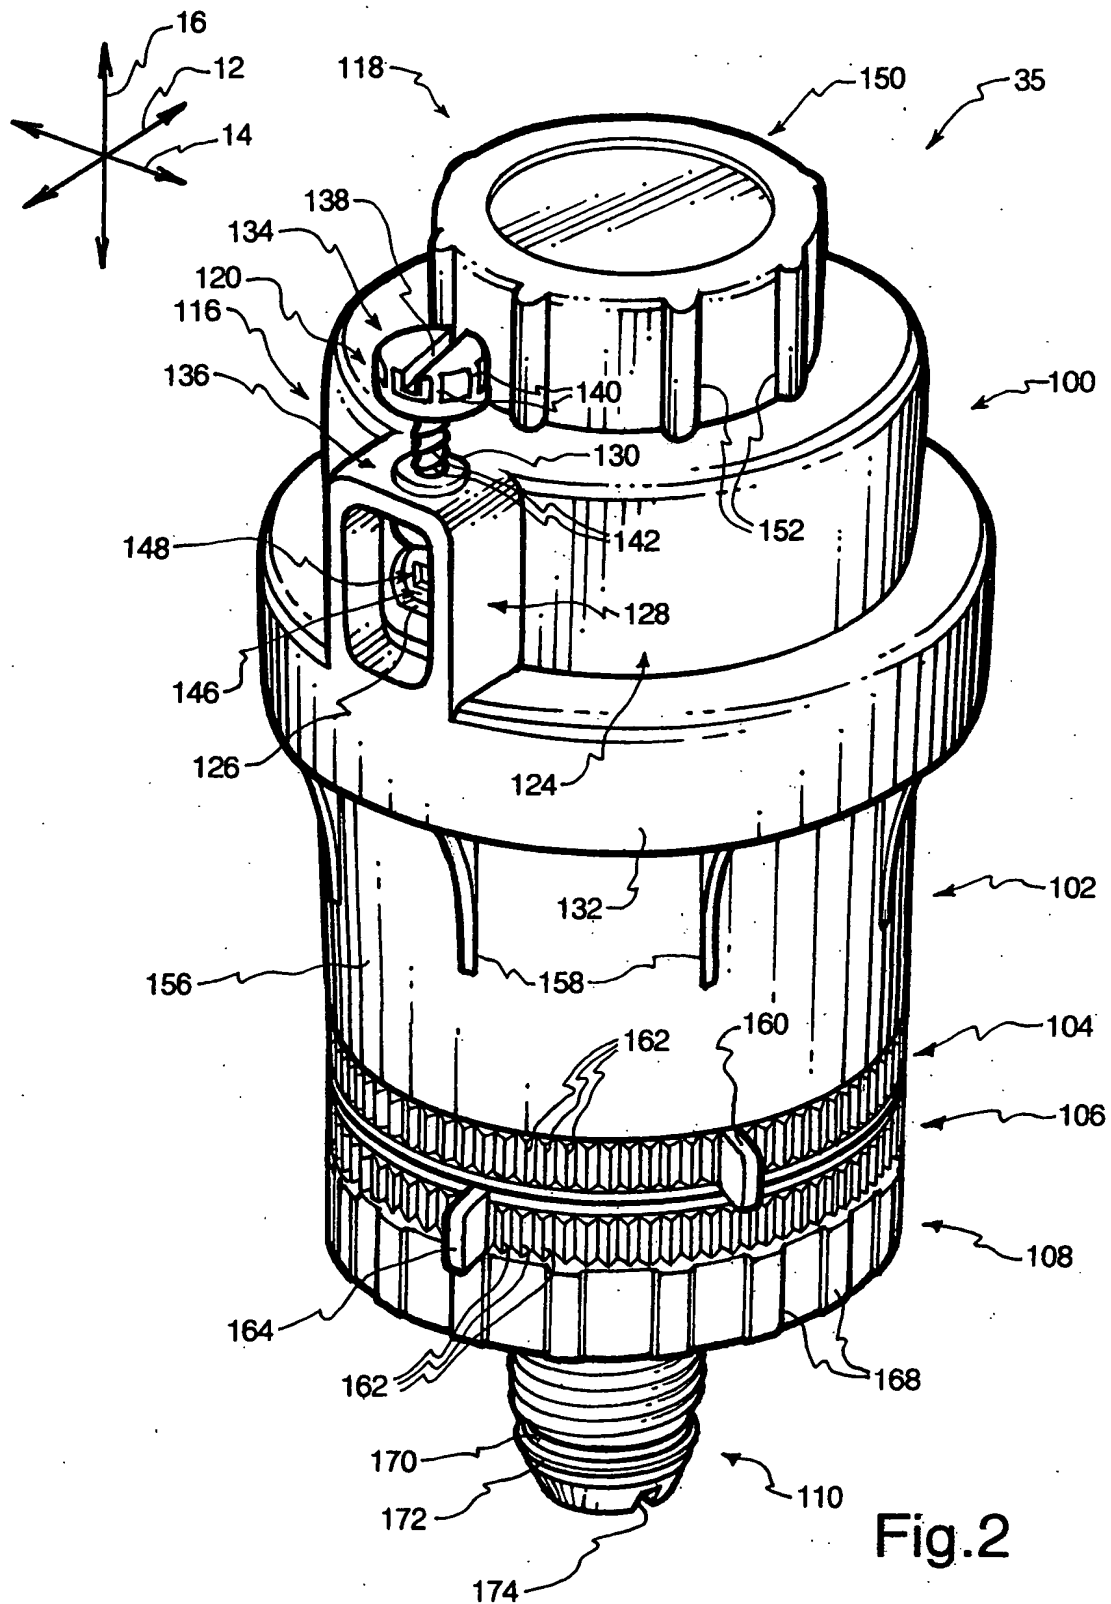


Fig. 2

Docket No.: 3146.2.34

Fig. 3 is an exploded perspective view of the device 100, showing the assembly of the upper housing, middle housing, base plate, and internal components. The upper housing (116) includes a top flange (124) and a central opening (128). The middle housing (118) features a central protrusion (150) and a base flange (200). The base plate (178) is a circular component with a central opening (230) and a base flange (240). The internal components include a gear (180) with a central shaft (182) and a base plate (184) with a central opening (260). The device 100 is shown in an exploded view, indicating the assembly sequence. A coordinate system (12, 14, 16) is provided for reference.


Fig.3

Title: ABOVE-GROUND ADJUSTABLE SPRAY PATTERN SPRINKLER

Inventors: Kent C. Ericksen, et al.

Docket No.: 3146.2.34


4 / 8

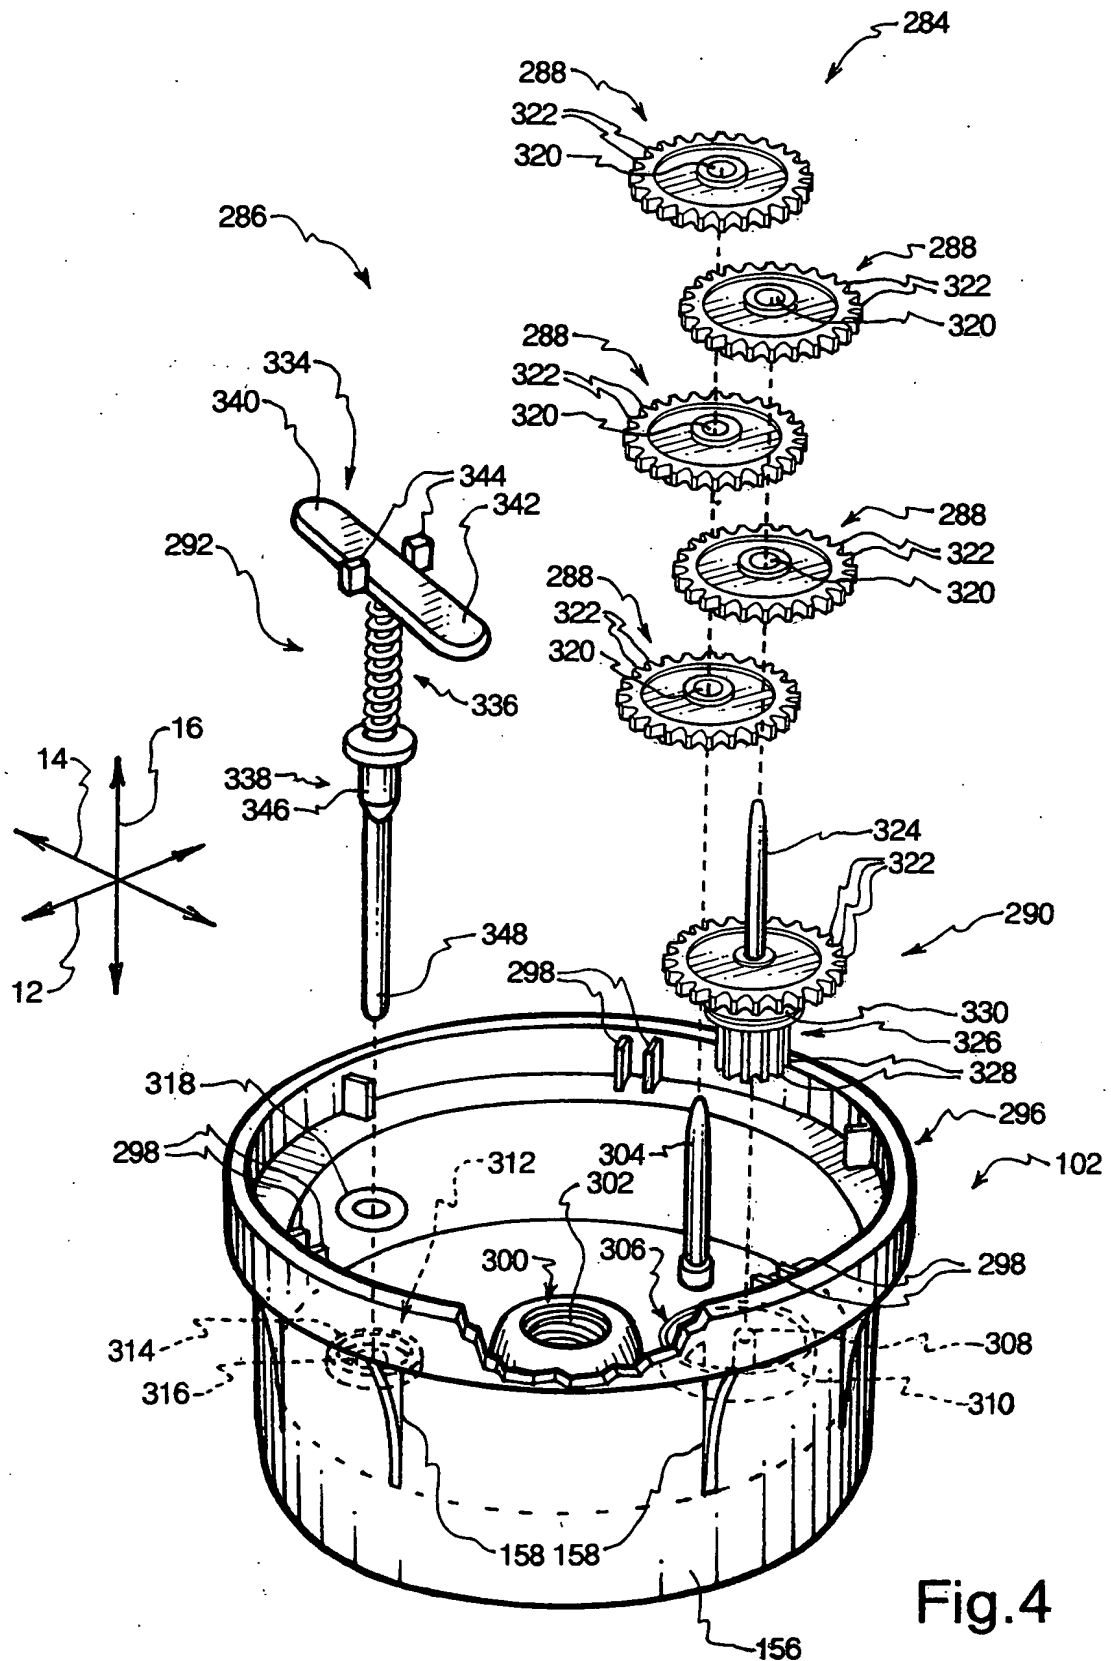

Title: ABOVE-GROUND ADJUSTABLE SPRAY PATTERN SPRINKLER

Inventors: Kent C. Ericksen, et al.

Docket No.: 3146.2.34

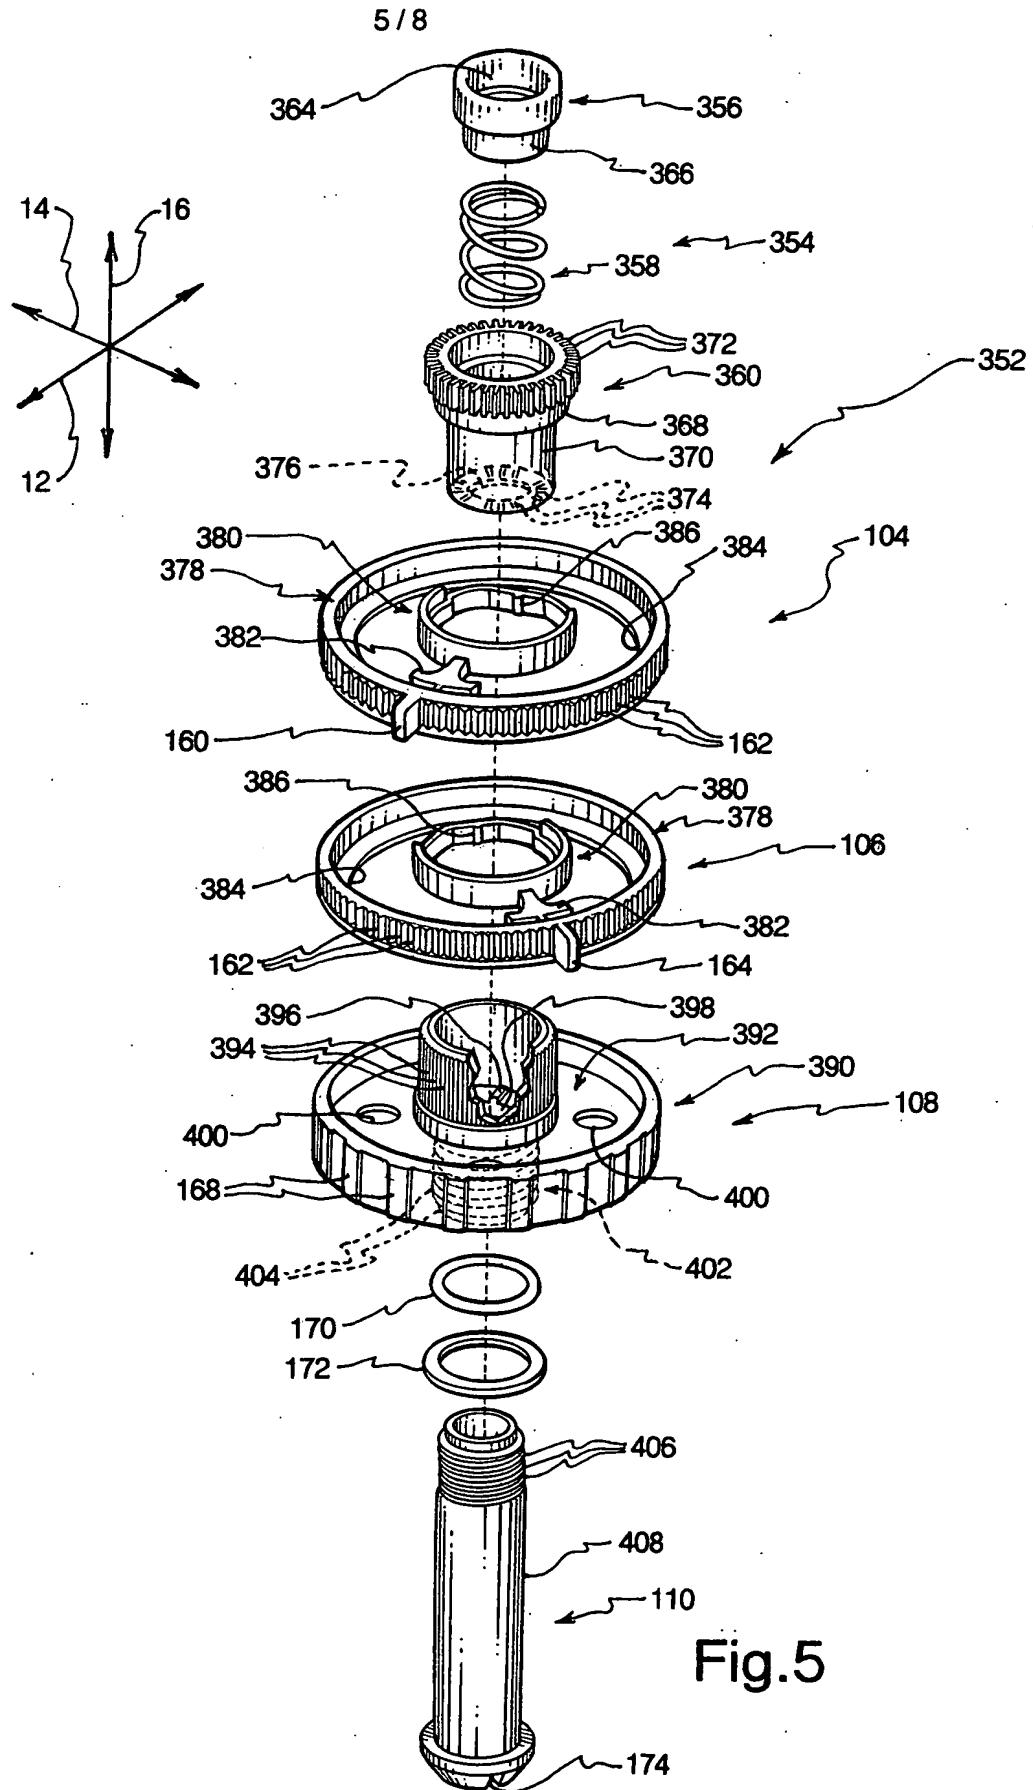

Title: ABOVE-GROUND ADJUSTABLE SPRAY PATTERN SPRINKLER

Inventors: Kent C. Ericksen, et al.

Docket No.: 3146.2.34

6 / 8

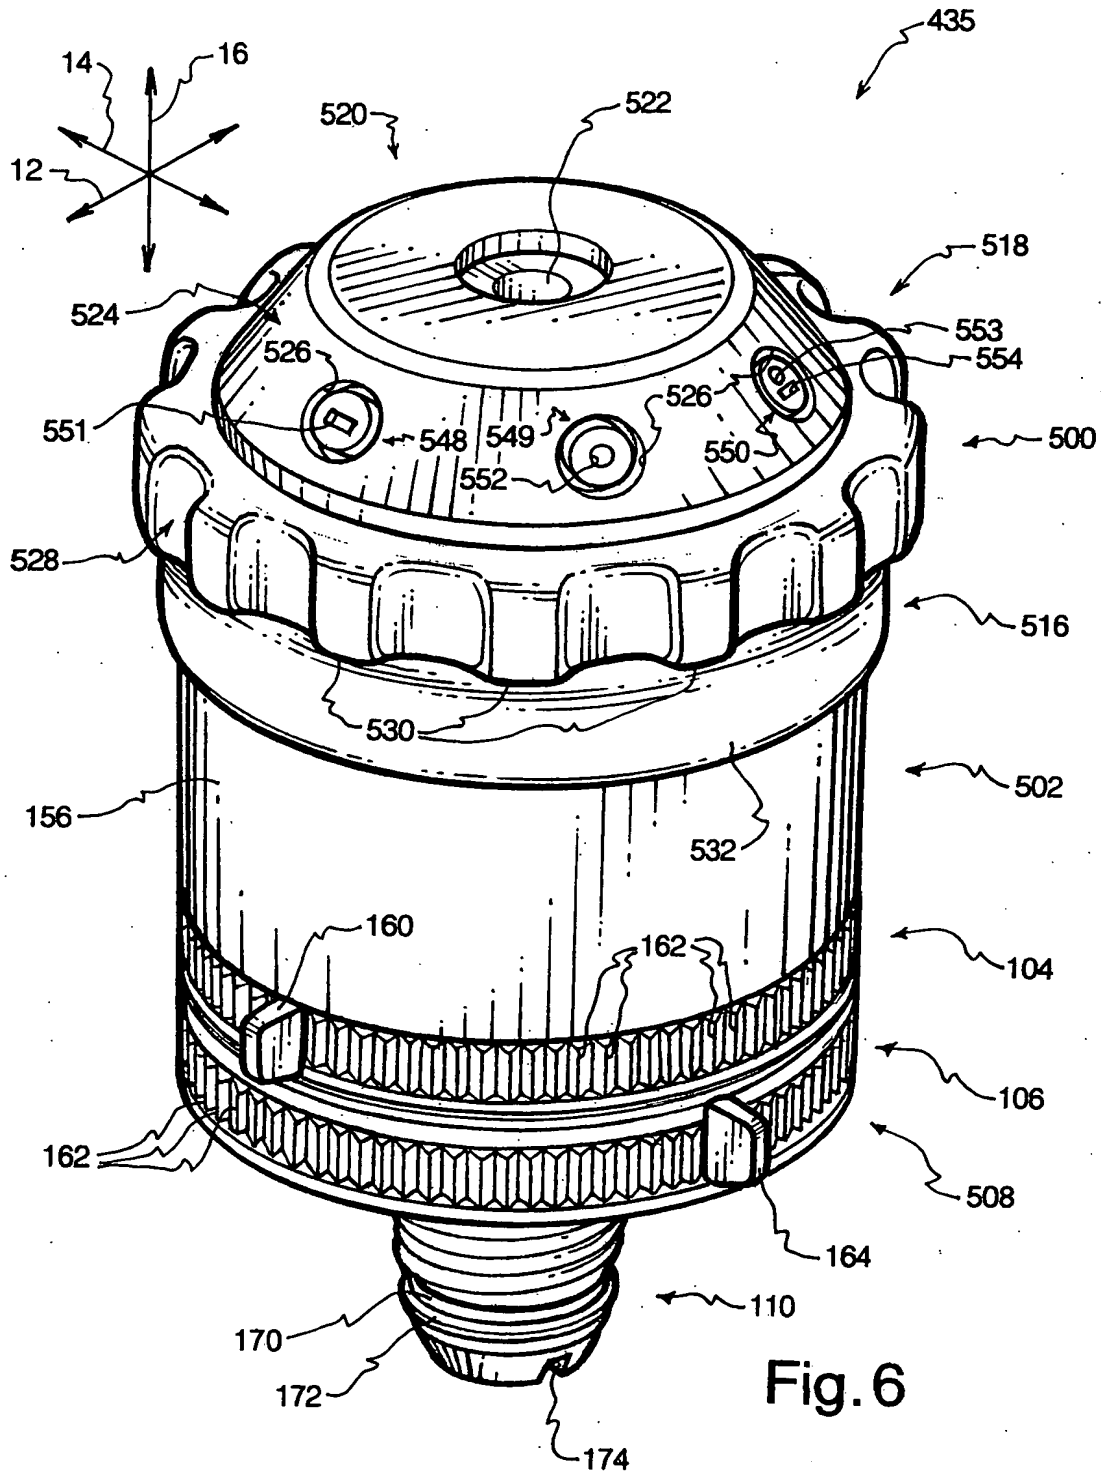


Fig. 6

Docket No.: 3146.2.34

A diagram of a six-pointed star (hexagram) with arrows on each of its six points. The arrows are labeled with numbers: the top-right arrow is labeled '12', the top-left arrow is labeled '16', and the bottom-left arrow is labeled '14'. The arrows on the top and bottom points are pointing upwards, while the arrows on the other four points are pointing outwards.



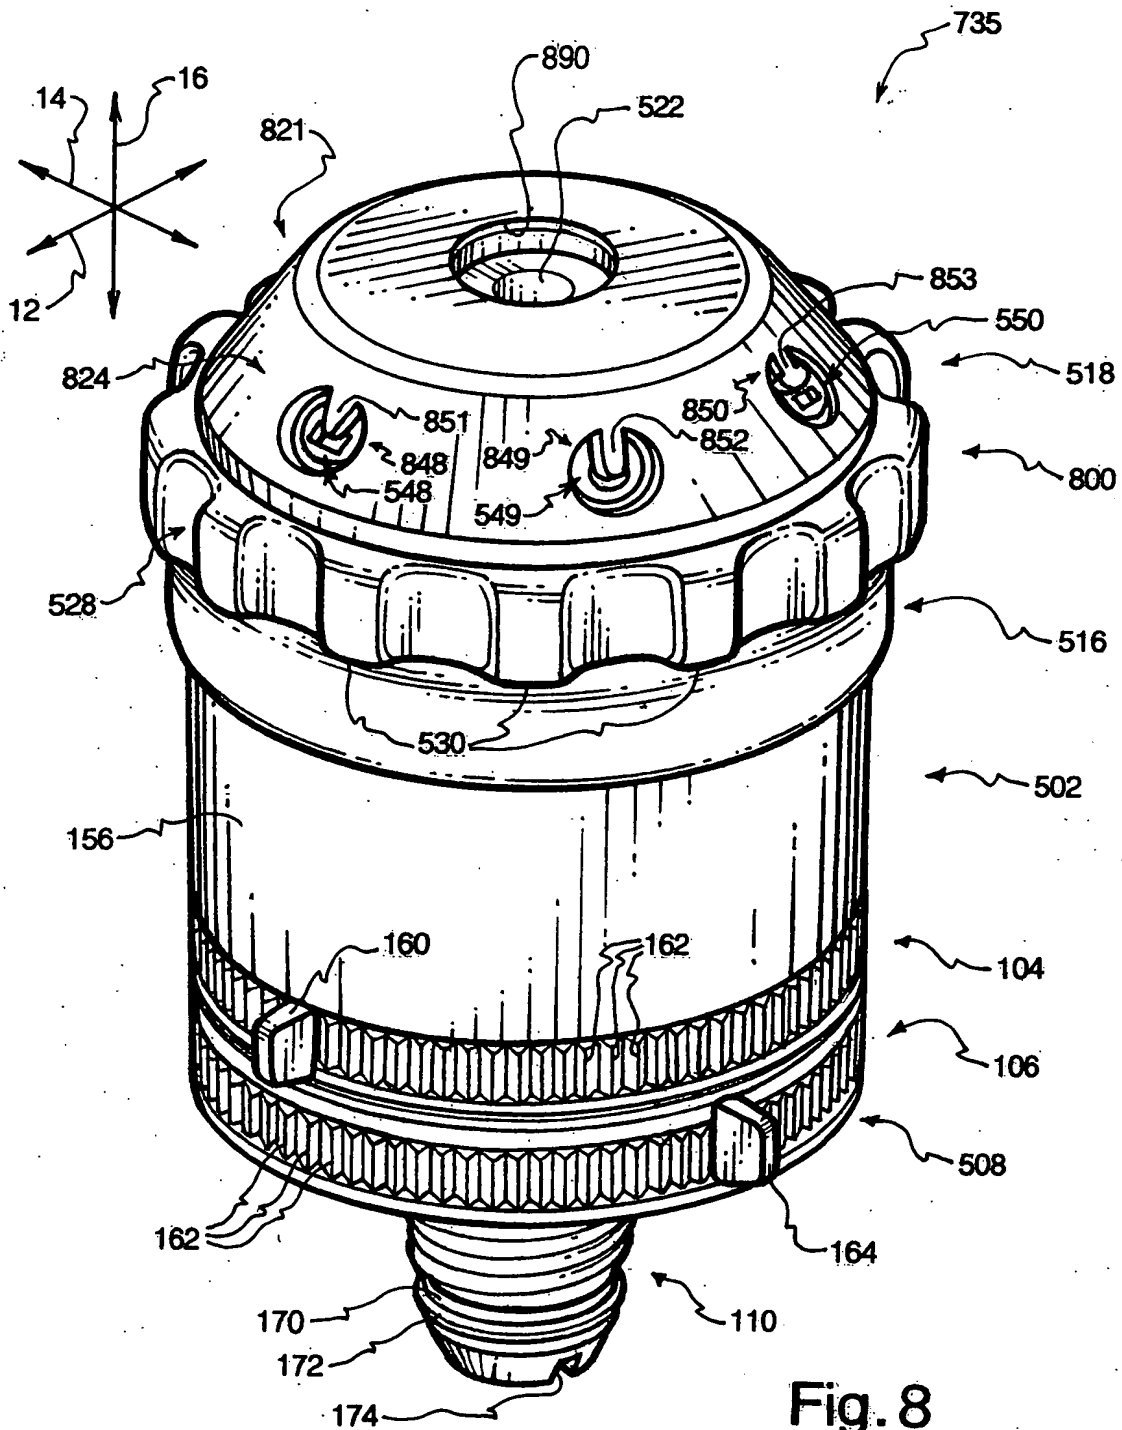


Fig. 8